

Reference Detector

Interference-Free Dosimetry Scanning

Sun Nuclear's Reference Detector is a patented out-of-field detector that uses linac head leakage to obtain a reference signal during water tank scanning of photon energies.




The Reference Detector works for commissioning measurements of any field size, but is especially helpful for small fields because it is fully out-of-field and does not impinge on the measurement. In addition, there is no need to reposition when changing field sizes -- saving considerable time for your physics staff.

Features & Benefits

- Used for beam scanning (commissioning and annuals)
- Compatible with 3D SCANNER™
- Eliminates shadowing and interference in-field detectors can cause
- Ideal for small SRS fields, but can be used for any field size; no need to move location for different field sizes
- Parallel plate design

Reference Detector Placement

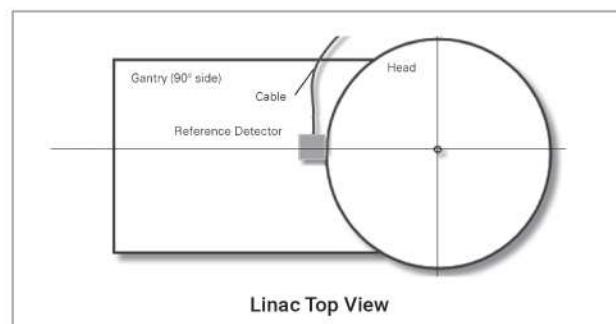

Reference Detector mounts to the top surface of a supported linac gantry using a non-invasive dual-lock fastener.



U.S. Patent No. 9,050,460 B2

ReferenceDetector_D071217

PEO B.V.

info@gotopeo.com

www.gotopeo.com

The Netherlands

Havenweg 16, 6603 AS Wijchen

+31 (0)24 648 86 88

Belgium

Watermolenstraat 2, B-2910 Essen

+32 (0)3 309 32 09

CoC 34107894


VAT NL807859151B01

IBAN NL29 RABO 0356 1960 46


BIC RABONL2U



Scans taken with Reference Detector

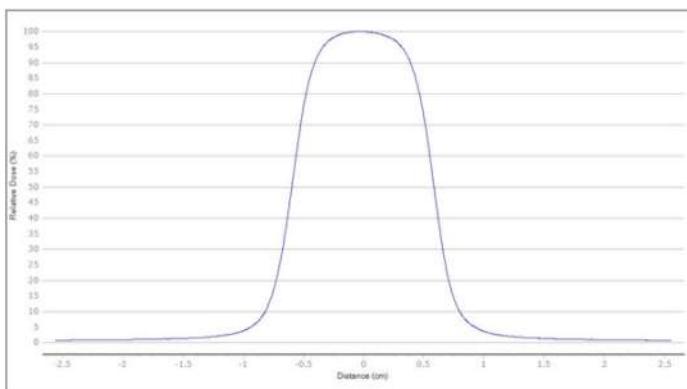

Profile of a 1.0 cm x 1.0 cm jaw defined field taken with 6MV at 100SSD with an EDGE Detector™ using the out-of-field Reference Detector

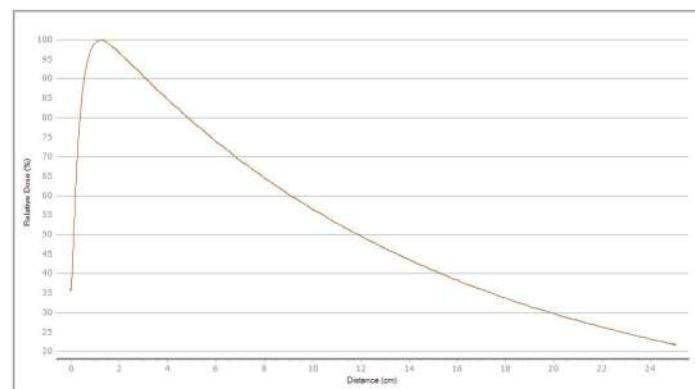

PDD of a 1.0 cm x 1.0 cm jaw defined field taken with 6MV at 100SSD with an EDGE Detector™ using the out-of-field Reference Detector

Specifications

Volume (cc): 39

L x W x H (mm): 125 x 105 x 15

Reference Point (mm): 2-meter cable with triaxial connector

